


Patch cords Duplex SC/APC-SC

P/N: **P09D-SCASC-000**

OS2 singlemode 9/125 μm (ITU-T G.652.D)

Note. : patch cord length must be specified in the order.

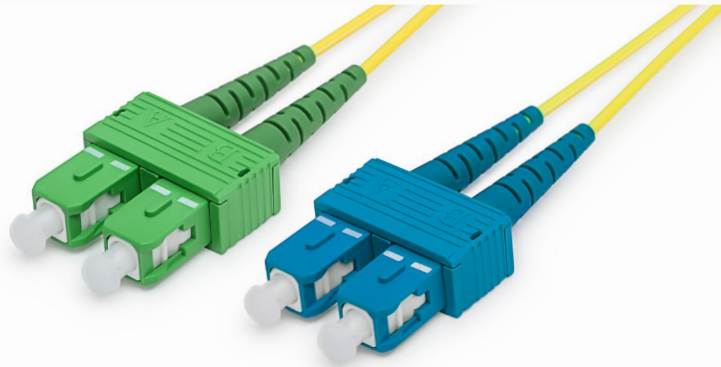

connector SC/APC properties

Connector SC/APC	singlemode OS2
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Insertion / extraction cycles	min. 1000

connector SC properties

Connector SC	singlemode OS2
Polishing	PC
Return loss	\geq 55 dB
Insertion loss	0,15 dB (typical)
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Insertion / extraction cycles	min. 1000

cable properties

Cabled optical fibre	OS2
Nominal diameter core / sheath	9 / 125 μm
Color	yellow
Outer diameter	3 mm a 2 mm
Sheath material	LSOH
Bending radius (static)	45 mm
Temperature range	-20 °C to +70 °C
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	\leq 0,4 / \leq 0,4 / \leq 0,4