

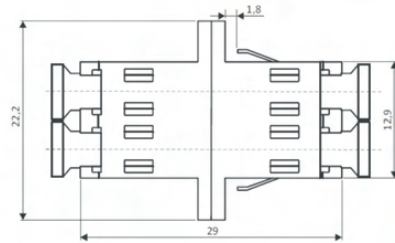


Multimode adapter LC-LC Duplex

P/N: KE-LC-MM-AQ

OM3
multimode

OM4
multimode



mechanical properties

Housing material	plastic
Alignment sleeve	ceramic (zirconia)
Insertion loss	< 0,2 dB
Durability	500
Operating temperature	-40°C to +80°C

related products

P/N: RAB-FO-X37-SL	Sliding patch panel for 24 x SC-SC, LC-LC Duplex or E2000-E2000 adapters
P/N: PIGOM3-LC-020	Pigtail LC
P/N: RAB-FO-X04	Splice cassette for 16 splices
P/N: F11002	Splice protection