


# Pigtail SC/APC

P/N: **PIG09-SCA-020** OS2 singlemode 9/125 μm (ITU-T G.652.D)

**OS2**  
singlemode

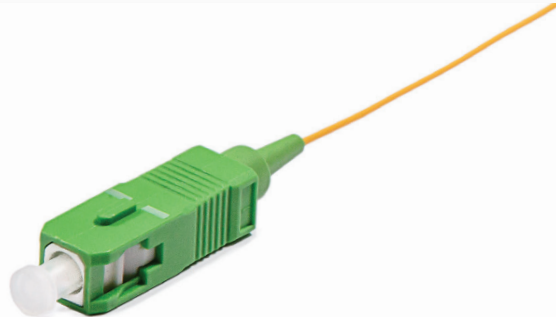

## mechanical properties

Connector SC/APC	singlemode OS2
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Length	2 m
Sheath material	halogen-free secondary EASySTRIP protection of 900 μm
Ferrule material	ceramic (zirconia)
Ferrule diameter	2,5 mm
Temperature range	-20 °C to +60 °C
Outer diameter	900±5 μm
Bending radius (static)	10 x 0,9 mm
Attenuation @ 850 / 1300 nm (dB/km)	-
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	≤ 0,4 / ≤ 0,4 / ≤ 0,4
Bandwidth 850 / 1300 nm (MHz.km)	-

## related products

P/N: <b>RAB-FO-X37-SL</b>	Sliding patch panel for 24 x SC-SC, LC-LC Duplex or E2000-E2000 adapters
P/N: <b>KE-SCA-SM</b>	SC/APC-SC/APC adapter
P/N: <b>RAB-FO-X04</b>	Splice cassetter for 16 splices
P/N: <b>F11002</b>	Splice protection