


Pigtail LSH/APC

P/N: **PIG09-LSHAPC-020** OS2 singlemode 9/125 μm (ITU-T G.652.D)

OS2
singlemode

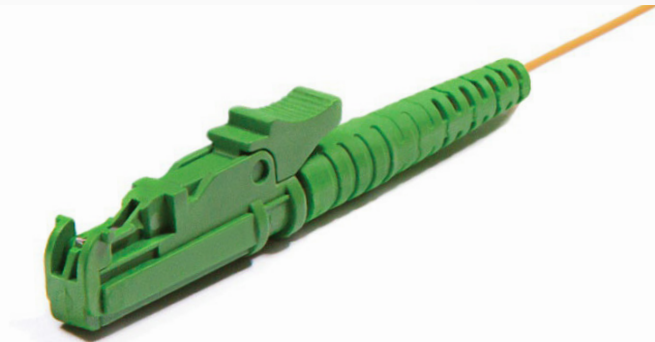

mechanical properties

Connector LSH/APC	singlemode OS2
Polishing	APC
Return loss	> 65 dB
Insertion loss	0,15 dB (typical)
Length	2 m
Sheath material	LSOH bezhalogénová sekundárna ochrana 900 μm EASySTRIP
Ferrule material	keramika (zirkón)
Ferrule diameter	2,5 mm
Temperature range	-20 °C až +60 °C
Outer diameter	900±5 μm
Bending radius (static)	10 x 0,9 mm
Attenuation @ 850 / 1300 nm (dB/Km)	-
Attenuation @ 1310 / 1383 / 1550 nm (dB/km)	≤ 0,4 / ≤ 0,4 / ≤ 0,4
Bandwidth 850 / 1300 nm (MHz.km)	-