


Multimode adapter ST-ST

P/N: KE-ST-MM

OM1
multimode

OM2
multimode

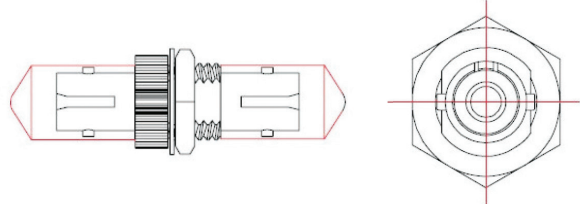

mechanical properties

Housing material	zinc alloy
Alignment sleeve	phosphor bronze
Insertion loss	< 0,2 dB
Durability	500
Operating temperature	-40°C to +80°C

related products

P/N: RAB-FO-X05-SL	Sliding patch panel for 24 x ST-ST or FC-FC adapters
P/N: PIG05-ST-020	Pigtail ST
P/N: RAB-FO-X04	Splice cassette for 16 splices
P/N: F11002	Splice protection