

HD patch cable STP, Category 6_A, LSOH

P/N: KEL-C6A-P-005HD	length 0.5 m	P/N: KEL-C6A-P-050HD	length 5 m
P/N: KEL-C6A-P-010HD	length 1 m	P/N: KEL-C6A-P-070HD	length 7 m
P/N: KEL-C6A-P-015HD	length 1.5 m	P/N: KEL-C6A-P-100HD	length 10 m
P/N: KEL-C6A-P-020HD	length 2 m	P/N: KEL-C6A-P-150HD	length 15 m
P/N: KEL-C6A-P-030HD	length 3 m	P/N: KEL-C6A-P-200HD	length 20 m



features

- "Push & Pull" boots secure easy connection and disconnection
- suitable to use even in high-density patch fields
- in extremely dense patch fields is possible to disconnect the patch cord with a tool
- individually shielded pairs with stranded wires, halogen-free sheath
- connector RJ45 complies with IEC 60603-7 standard by its dimensions and transmission features
- enables transmission of all high-speed protocols including 10GBASE-T
- guarantees a bandwidth of 500 MHz
- perfectly shielded against Alien Crosstalk and electromagnetic interference

application

- primary (Campus), secondary (Riser), tertiary (Horizontal)
- IEEE 802.3: 10Base-T; 100Base-T; 1000Base-T; 10GBase-T
- IEEE 802.5 16 MB; ISDN; FDDI; ATM
- high bandwidth digital applications with low BER

construction

Conductor	stranded bare copper wire, AWG 27 / 7	
Sheath	low smoke, halogen-free (LSOH)	
Contact pin material	phosphor-bronze alloy coated with 50 μ of gold	
Boots material	polycarbonate	
Outer cable diameter	5,8 mm	
Color (standard)	cable	gray RAL7035
	boots	gray RAL7035

mechanical properties

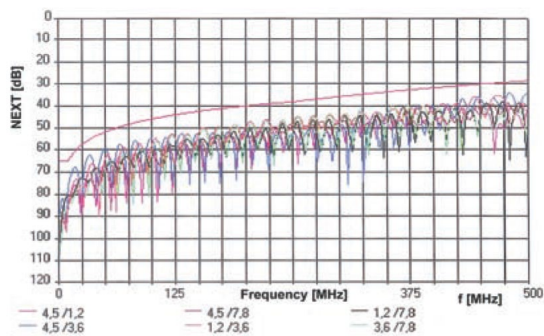
Insertion / extraction cycles	min. 750
Temperature range	-25 °C to +60 °C
Min. bending radius	25 mm

electrical properties (connector)

Voltage rating	-	125 V AC
Current rating	-	1 A
Contact resistance	100 mA (DC or 1000Hz)	50 mΩ max.
Insulation resistance	100 V DC	100 MΩ min.

electrical properties (cable)

Loop resistance	-	≤ 340 Ω/ km
resistance unbalance	-	≤ 3%
insulation resistance	(500V)	≥ 2000 MΩ x km
Capacity	at 800 Hz	nom. 43 nF/ km
Capacity unbalance	(pair/ground)	≤ 1500 pF/ km
Charasteristic impedance	at 100 MHz	(100 ± 5) Ω
Coupling attenuation	Typ II (≥ 55dB@100MHz)	Alien crosstalk (ANEXT, AFEXT) is proven by design
Nominal velocity of propagation (NVP)	-	cca 79%
Propagation delay	Nominal	≤ 427 ns/100 m
Delay skew	Nominal	≤ 12 ns/100 m
Test voltage	(DC, 1 min) core/core, core/screen	1000 V
Transfer impedance	at 1 MHz	≤ 50mΩ/ m
	at 10 MHz	≤ 100 mΩ/ m
	at 30 MHz	≤ 200 mΩ/ m

typical NEXT

typical return loss
